



Need  
performance  
under pressure?

You need

 LeesonBound®



Leeson  
Polyurethanes

# Performance under pressure

Non hazardous, fast curing, flexible solvent free resin for encapsulation of decorative aggregates. Systems cures to give attractive, durable finish.

## WHY CHOOSE LEESON?

Established in 1986, Leeson Polyurethanes Ltd has been supplying high performance stonebinder since the mid 1990's. With experience built over 20 years, you can rely on our high performance stonebinder products to deliver for you time and again.

## USES

- SUDS areas
- Driveways
- Paths
- Swimming pool surrounds

## BENEFITS

- High strength system
- Porous/ SUDS compliant
- Range of approved aggregate blends
- Excellent Track Record
- UV and non UV stabilized versions available



High Strength



With or without  
UV stabilisation




High  
temperature  
resistance



Fast Curing



Chemical  
resistant

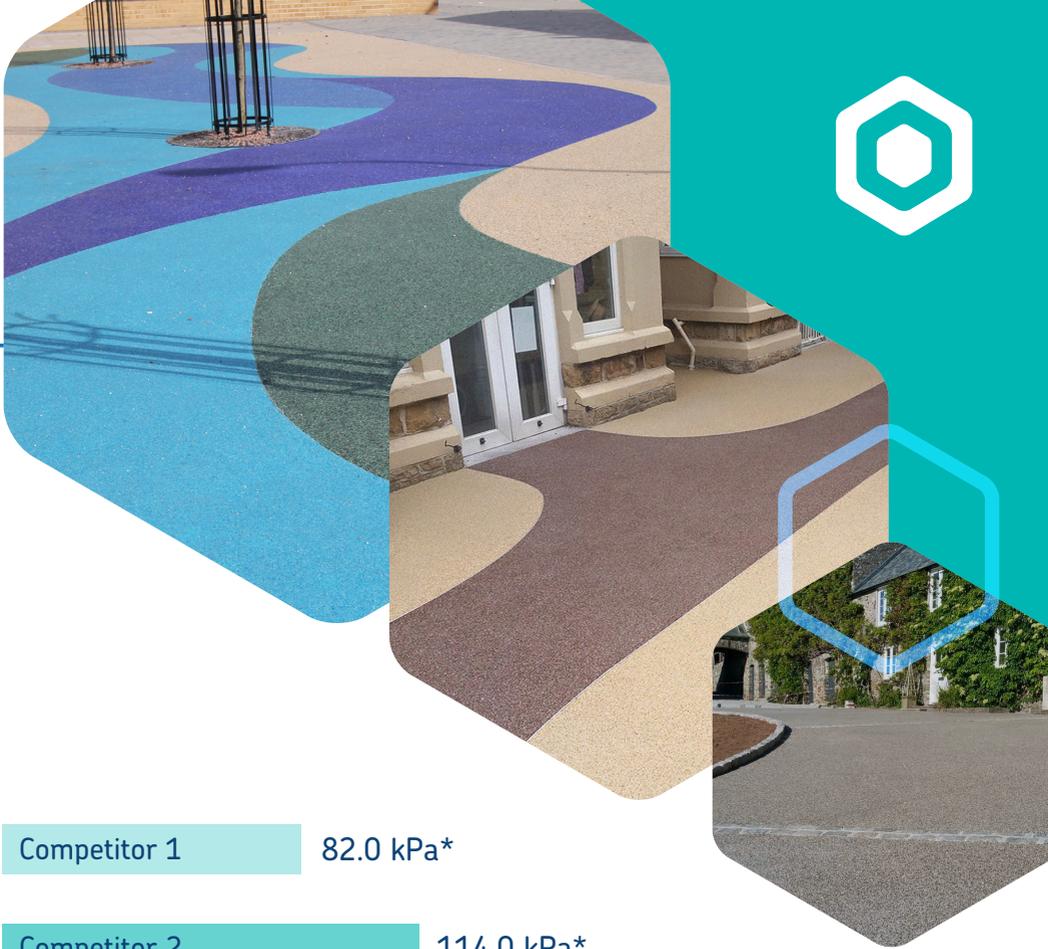

Competitor 1

82.0 kPa\*

Competitor 2

114.0 kPa\*

Competitor 3

143.0 kPa\*

 LeesonBound UV Stable System

265.0 kPa



{ The Strongest UV Stable Stonebound Surfacing System }

{ A bond for life }

\*Tested to ASTM D790 based method by Leeson Polyurethanes Ltd








# Technical specification

The figures below are typical properties achieved in laboratory tests at 21°C and 55% Relative Humidity.

- Resistant to temperatures of up to 60°C for long periods
- Resistant to various acids, diesel and petrol as well as strong bases

## PU4844/60 UVR

- Elongation @ Break (PU4844/60 UVR)
  - ◆ 110% to BS2782 Part 3
- Tensile Strength
  - ◆ Min 5.3 N/mm<sup>2</sup> to BS2782 Part 3

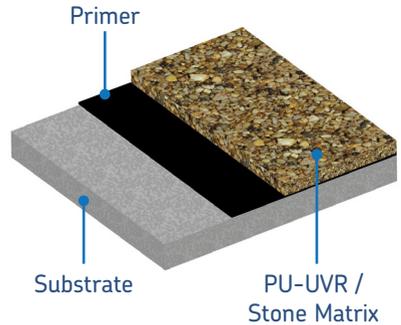

{ A bond for life }



**Leeson Polyurethanes Ltd.**

Hermes Close, Warwick, CV34 6RP, UK.

Tel: +44 (0) 1926 833367 Fax: +44 (0) 1926 881469  
 sales@lpultd.com | www.lpultd.com