

SabreBond[™] SMP1043


SabreBond SMP1043 is a two-component adhesive and sealant based on a silane-modified polymer. Curing is induced by mixing the components at room temperature. The product has good stability and is free of solvents, isocyanates, silicones and PVC. This product has good adhesion to many substrates and a very good electrical insulation effect.

Application

SabreBond SMP1043 is used for elastic bonding and sealing of metals and plastics.

Technical Characteristics (at 20–25°C, unless otherwise stated)

Components	SabreBond SMP1043 (Resin)	SabreBond SMP1043 (Hardener)
Color	White	Beige
Appearance	Paste	Paste
Viscosity (mPa s); Brookfield DV-II+ Pro	25000	25000
Density (g/cm ³)	1,30 ± 0,05	1,30 ± 0,05

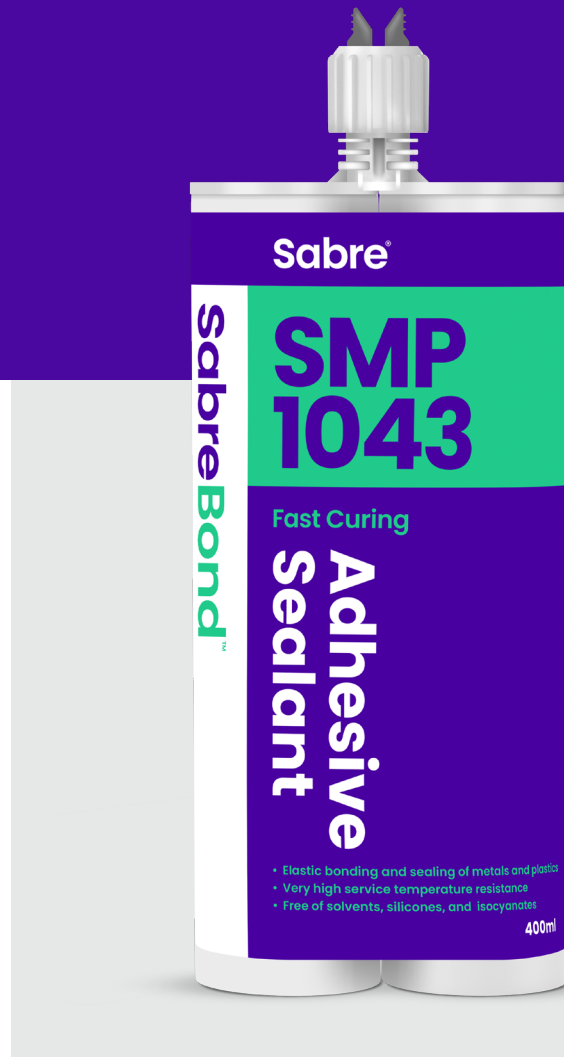

Components	SabreBond SMP1043 (Resin)	SabreBond SMP1043 (Hardener)
After Mixing		
Pot-Life (min)	15 - 20	
Full-Cure (days)	7	
After Cure		
Tensile Strength (MPa)	1,8	
Elongation at break (%)	200	
Tensile strength (Alu/Alu) (MPa)	1,8	
50% strength (at 60°C) (min)	25 - 30	
100% strength (at 60°C) (min)	180	
50% strength (at 80°C) (min)	10 - 15	
100% strength (at 80°C) (min)	120	
Hardness (Shore A)	43 ± 5	
Application Temperature (°C)	5 - 40	
Service Temperature (°C)	-40 - 80	

Preparation and Use

Comment

The components have to be stored in tightly sealed containers. Ensure adequate ventilation during use. Avoid direct skin contact with the individual components or the non-cured mixture. Wear protective gloves and glasses. The surface to be potted or glued should be dry, free of grease and dust and should have no other contamination. Coatings (e.g. paints) on metal surfaces or any release agent on plastic surfaces should be removed. Formation of condensation on the substrate should be avoided. To do this, heat the substrates to room temperature. A low temperature increases the viscosity of the product.

Use

The product can be processed manually or by mechanical or pneumatic dosing. The product can be cured at room temperature. By heating, curing can be accelerated.

Cleaning

Non-cured adhesive or the individual components can be removed with solvent. Pay attention to the compatibility of the substrate with the solvent. Cured adhesive can only be removed mechanically.

Storage

The product must be stored at temperatures between 10 and 30°C. Direct sunlight, heat, frost or moisture must be avoided. The material can be stored in the original sealed containers for 9 months.

Packaging

400ml cartridge or on request.

Safety

In any case, observe the valid safety data sheet before using the product.

DISCLAIMER OF WARRANTY

Manufacturer and distributor of this product make no warranty, express or implied, including, but not limited to any implied warranty of fitness for a particular purpose. No warranty is made as to the use or effects incidental to such use, handling or possession of the materials herein described. User is responsible for determining whether this product is fit for a particular purpose and method of application and assumes all risk and liability associated herewith. Manufacturer liability is limited to replacement of product or reimbursement of purchase cost at its sole discretion. No representative of ours has authority to change this provision which relates to all sales.

New Zealand

+64 6 366 0007
40-42 Cambridge St South
Levin 5510

Melbourne

+61 3 8657 5507
67 Gateway Blvd
Epping, VIC 3076

Sydney

+61 2 9098 8244
Level 6, 10 Herb Elliott Ave
Sydney Olympic Park, NSW 2127